



CRST4133

尺寸(Dimensions):23X15.5X26mm

特点 Features

- 1,最大切换电流达 35A Switching capacity up to 35A.
- 2,供汽车配套使用 Suitable for automobile system and automobile auxiliary etc.
- 3,具有插入式和印刷线路板式两种安装方式 PC Board mounting and direct insert mounting available.

订货信息 Ordering information

CRST 4133--C-S-DC12V--L-P---R

1 23 4 56 7

- 1,型号 Part number: CRST4133
- 2,触点形式 Contact arrangement:A:1A; C:1C
- 3,封装形式:S:试水式;Z:防尘式 Enclosure: S:Sealed type; Z:Dust cover
- 4,线圈额定电压 Coil rated voltage(V):DC:6,12,24
- 5,线圈功耗 Coil power consumption: L:1.2W; Nil:1.5W
- 6,引出端 Terminals: P:PCB Type; Nil: Plug in type
- 7,线圈瞬态抑制:R:带电阻;无:标准式 Coil transient suppression: R:with Resistance; Nil: Standard

触点数据 Contact data

触点形式 Contact Arrangement	1A(1H)(SPST NO);1C(1Z)(SPDT)	
触点材料 Contact Material	AgNi, AgSnO ₂	
触点负载(阻性) Contact Rating(Resistive)	1A(35A,25A/14VDC) 1C(NO:30A/14VDC,NC:25A/14VDC)	
最大切换功率 Max.Switching Power	490W	
最大切换电压 Max.Switching Voltage	75VDC 最大切换电流 Max.Switching Current:40A	
触点阴性或压降 Contact Resistance or Voltage Drop	≤50mΩ	
寿命 Operation Life	电气 Electrical	10 ⁵
	机械 Mechanical	10 ⁷

线圈参数 Coil Parameter

线圈电压 Coil voltage (VDC)		线圈电阻 Coil Resistance Ω ±10%	吸合电压 VDC(最大) Pick up Voltage VDC(Max) (额定电压的 70%) (70% of rated voltage)	释放电压 VDC Release voltage VDC(Min) (额定电压的 10%) (10% of rated voltage)	线圈功耗 Coil power consumption n (W)	动作时间 Operate Time (mS)	释放时间 Release Time (mS)
额定 Rated	最大 Max						
6	7.8	30	4.2	0.6	1.2	≤10	≤7
12	15.6	120	8.4	1.2			
24	31.2	480	16.8	2.4			
6	7.8	24	4.2	0.6	1.5		
12	15.6	96	8.4	1.2			
24	31.2	384	16.8	2.4			

注意:1,使用的线圈电压低于线圈额定电压时将会损害继电器的工作.

2,吸合,释放电压仅供检测用,不是设计的使用指标.


Caution:1,The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.

2,Pick up and release voltage are for test purposes only and are not be used as design criteria.


技术特性 Operation condition

绝缘电阻 Insulation Resistance	最小 100M Ω min(at 500VDC)
介质耐压 Dielectric Strength	
断开触点间 Between Contacts	50Hz 500V
触点与线圈间 Between Contacts and Coil	50Hz 1000V
耐冲击 Shock Resistance	100m/s ² 11ms
抗振性 Vibration Resistance	10~40Hz 双振幅 Double amplitude 1.27mm
引出端强度 Terminals Strength	8N 4N(PCB)
可焊性 Solderability	235±2℃ 3±0.5s℃
环境温度 Ambient Temperature	-40~85℃
相当湿度 Relative Humidity	85%(at 40℃)
质(重)量 Mass	18.5g


外形尺寸 Dimensions(mm/Inch)

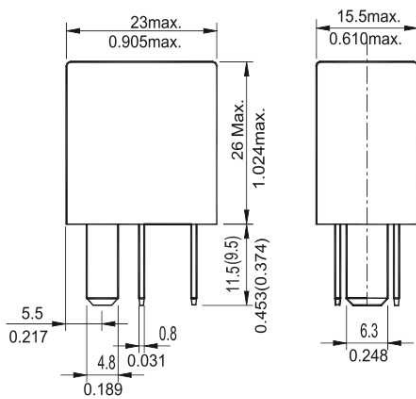

外形尺寸图
Dimensions

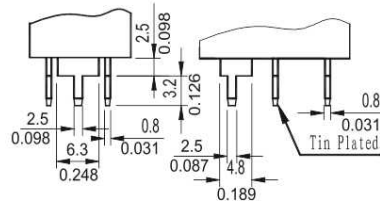


Note: Terminals as shown above are also available.

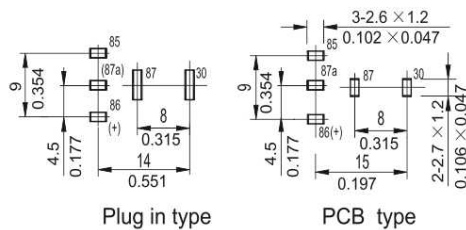

Plug in type

PCB type

安装尺寸图 (底视图)
Mounting (Bottom view)

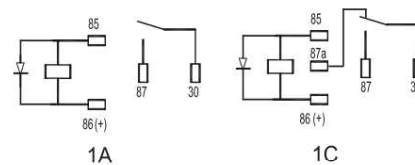

接线图 (底视图)
Wiring diagram (Bottom view)

- 注: 1) 尺寸以毫米为单位。
NOTES Dimensions are in millimeters.
- 2) 给出的等量英寸值仅供参考。
Inch equivalents are given for general information only

参考数据 Reference Data

